

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 July 2001 (19.07.2001)


PCT

(10) International Publication Number
WO 01/52180 A1

- (51) International Patent Classification⁷: G06K 9/00 5577 Highland Court, Mountain Green, UT 84050 (US).
MILLER, David; 596 East 3350 North, North Ogden, UT 84414 (US).
- (21) International Application Number: PCT/US01/00829
- (22) International Filing Date: 10 January 2001 (10.01.2001) (74) Agents: KRIEGER, Michael, F. et al.; Kirton & McConkie, 1800 Eagle Gate Tower, 60 East South Temple, Salt Lake City, UT 84111 (US).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/175,460 10 January 2000 (10.01.2000) US (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (71) Applicant: TARIAN, LLC [US/US]; 3483 Airport Road, Ogden, UT 84405 (US).
- (72) Inventors: MURAKAMI, Rick, V.; 596 East 3350 North, North Ogden, UT 84414 (US). PETTIT, Matthew, W.; (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: DEVICE USING HISTOLOGICAL AND PHYSIOLOGICAL BIOMETRIC MARKER FOR AUTHENTICATION AND ACTIVATION

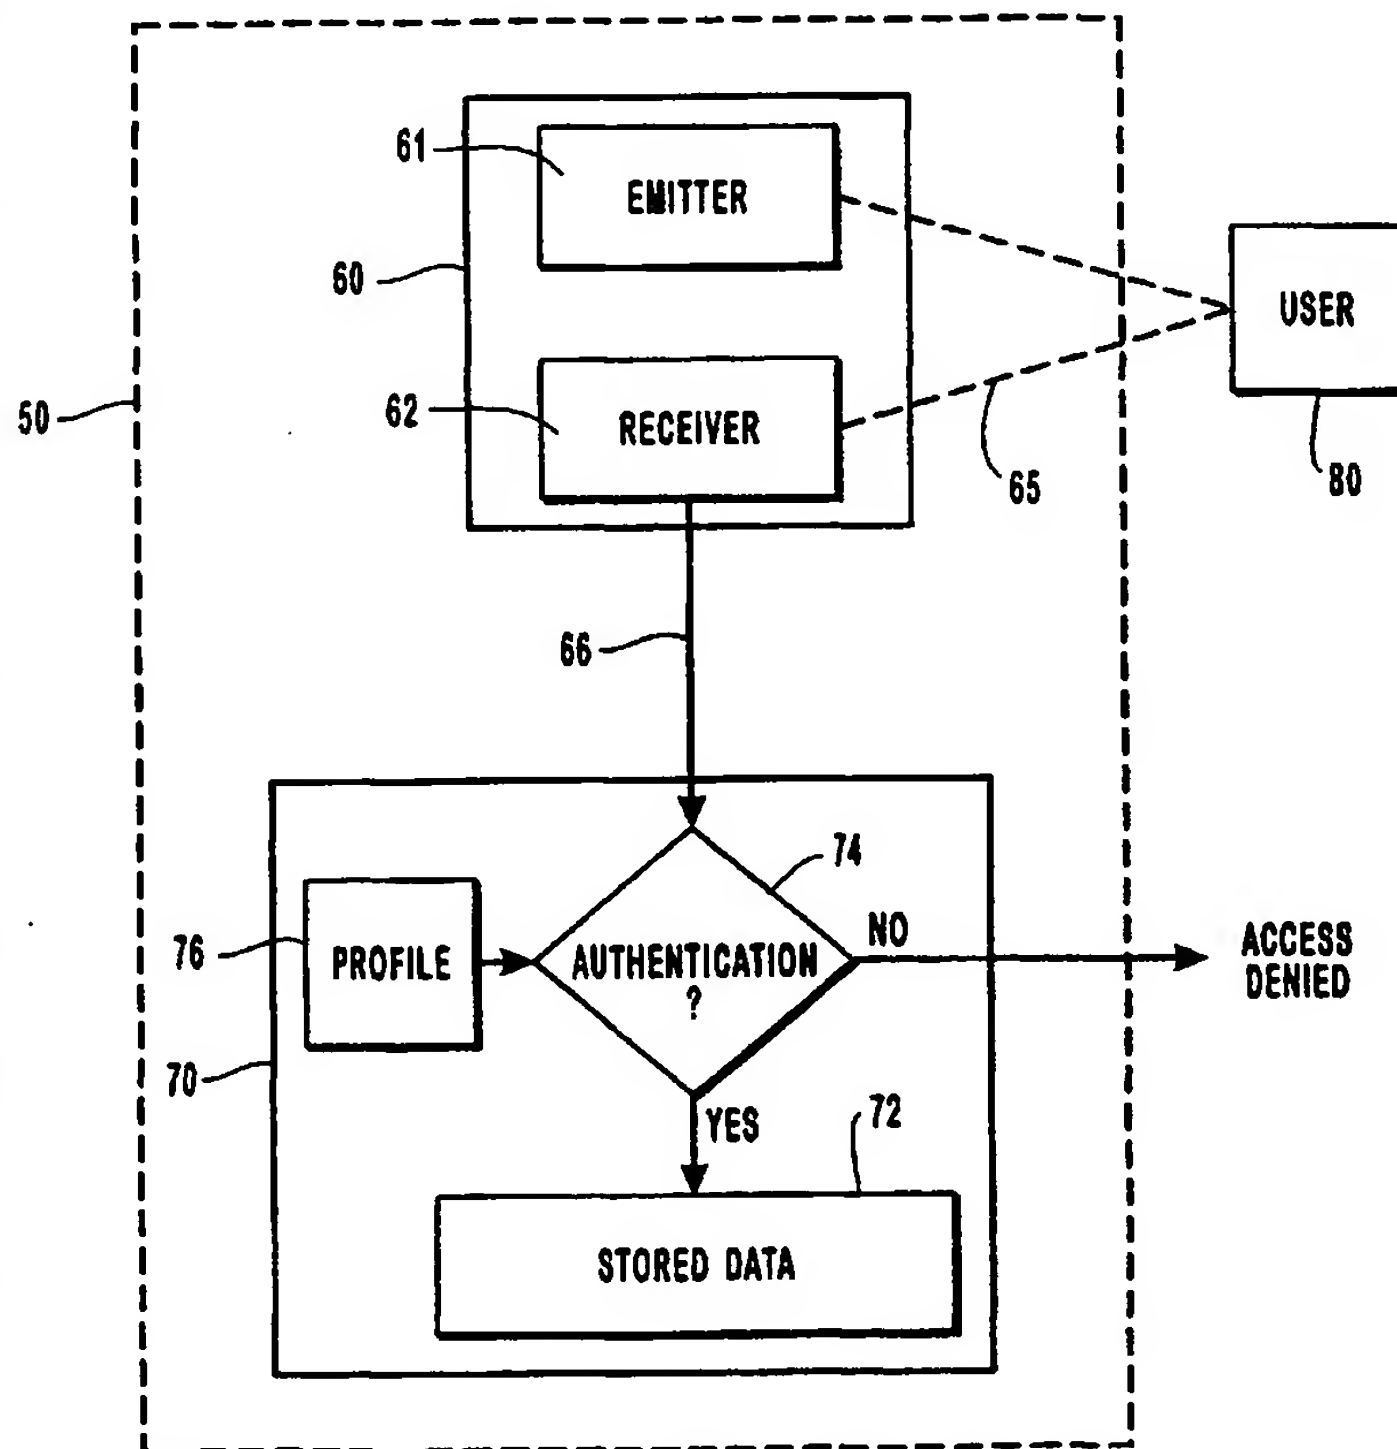

(57) Abstract: A biometrically activated device (50) wherein data derived from detection of unique internal biometric traits are stored (72) within said biometrically activated device to be compared to stored data relative to said internal biometric markers or traits previously scanned from a user (80) of said biometrically activated device. The biometrically activated device may allow or disallow access to information, or provide use of, data or a device protected by the biometrically activated device.

WO 01/52180 A1



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

**DEVICE USING HISTOLOGICAL
AND PHYSIOLOGICAL BIOMETRIC MARKER FOR
AUTHENTICATION AND ACTIVATION**

5

BACKGROUND OF THE INVENTION

Field of the Invention: The present invention relates generally to a biometrically activated device. More specifically, the invention relates to a biometrically activated device capable of authenticating or verifying a user's identity based on a unique internal biometric marker, or combination of unique internal biometric markers, of a user, thereby allowing or denying access to and/or control over an electronic component.

State of the Art: Security devices have been around for ages. From draw-bridges to locks on doors and furniture, people have attempted to secure their well-being and personal belongings from harms way. As technological advances were made, new means of security were created. Door locks require codes to disengage the lock, car doors are equipped with number pads, vehicle ignition keys include microchips encoded to communicate with the vehicle so as to prevent theft. Financial transactions have also become more secure. Currency is more sophisticated in order to thwart copying, credit cards require authentication signatures, bank account access requires account numbers, and personal identification numbers are issued for everything from calling cards to internet access to stock market trading accounts.

As technology continues to advance at a rapid rate, the search for more sophisticated, unbreakable, security measures continues. The key to an effective security system is the identification of the individual or entity attempting to access that which is protected by the security system, be it a home, financial information, or communications. Mechanical keys can be copied, personal identification numbers stolen, and credit cards misused without much trouble. The level of theft is evident from the billions of dollars in fraudulent financial transactions taking place each year, stolen vehicles, and home break-ins. Of particular concern is the relatively new crime wherein a persons 'identity' is stolen. In this day and age, a person's identity is closely tied to a bank account number, a phone number, an identification number, a social security number, or other such information which is easily stolen and then used to access the owner's information or property. When such a crime occurs, the victim suffers financial decimation, credit destruction, and countless hours of agony in attempting to 'rebuild' their 'identity'.

One form of fraud involves electronic transaction fraud, such as fraudulent credit and debit card transactions. Typically, a magnetic strip on one surface of such cards carries an electronic form of a series of numbers, which identifies the account to be

credited or debited. To execute a financial transaction using such a card, all that is needed is the series of numbers and authentication that the card is being used by the authorized user. Such authorization typically consists of photo identification or verification of a signature if the card is being used in a person to person transaction.

5 Transactions conducted through other media, such as the telephone or over the internet, are often authenticated using some other form of identification, such as the billing address or phone number of the authorized user of the card. Because this information is often readily available to the public, such authentication processes are not very secure.

10 In the electronic transaction market, efficient identification of people is not only very critical, but very difficult, due to the rapid nature of monetary exchanges. In cases of pure electronic transactions, there is no physical document that acts as a transaction mechanism. In addition to this, most electronic transactions are performed from a location that is remote relative to the funds involved. The identification of the holder of the transaction device, such as a credit card, is the responsibility of the merchant or third
15 party willing to accept an electronic transaction. Accurate identification and authentication of the validity of the transaction device is not always possible and, even when obtained, is not always accurate.

The advent of the internet has added an entirely new dimension to the problems associated with electronic transaction fraud. The internet provides a medium wherein the
20 user of a transaction device and a third party willing to accept an electronic transfer of funds never have any actual contact. This creates further authentication problems for the third party because the transfer device is not physically present, the identification of the user is not visually apparent, and a telephone number cannot be authenticated. As a result of the increased use of e-commerce, and ensuing authentication difficulties therewith, the
25 incidence of electronic transaction fraud has been on the increase. In the immediate future, the opportunity and incidence of fraud will increase correspondingly unless sufficient security measures capable of positively identifying an individual are implemented.

The market has responded to the difficulties of authenticating electronic transfer
30 devices, and positively identifying individuals, by searching for a viable biometric solution to the problems. Biometric technology generally involves the electronic identification of an individual using physiological traits which are unique to that same individual. Fingerprints are an excellent example of a biometric marker used for years to provide the unique identification of individuals. Because a fingerprint is unique to an
35 individual, the identity of that individual may be determined through an analysis of the

fingerprint. Thus, the identity of the individual, determined from a fingerprint, may act as a 'key' to unlock data or allow access through a door.

In particular, fingerprints have been used to secure some transactions and have been proposed for use in other areas. Many banks require that a finger print or thumb
5 print of a person cashing a check be placed on the check. This allows the bank to later verify or identify anyone passing fraudulent checks. Along a similar line, it has been proposed that Automated Teller Machines (ATM) be equipped with fingerprint pads to provide further security to ATM transactions. An ATM having a fingerprint pad would require the user to validate their ATM card by way of their fingerprint. This could be
10 accomplished by inserting the ATM card into the machine, entering a Personal Identification Number (PIN), and then requiring the user to place their thumb or finger on the pad so that the ATM machine can analyze the fingerprint and confirm the identity of the individual using the card. Such a system would necessarily rely on a database built into the ATM or connected to the ATM, to provide a list of users and corresponding
15 fingerprint information. The fingerprint of the user could be compared to the data in the database to confirm that the ATM card being used did in fact belong to the person associated with the fingerprint placed on the fingerprint pad of the ATM.

Other known biometric markers include palm prints, iris scans, proportional comparison of physical traits, and voice recognition. For the most part, these biometric
20 markers, like the fingerprint, are external physiological traits or characteristics. Information unique to an individual is gathered through various scanning processes which scan a external biometric marker of an individual. A number of United States Patents discuss biometric devices which may be used to help identify a person. Examples of external biometric devices include those described in United States Patents: 4,537,484;
25 4,544,267; 4,699,149; 4,728,186; 4,784,484; 5,073,950; 5,077,803; 5,088,817; 5,103,486; 5,230,025; and 5,335,288 Internal biometric data has also been used to verify that a subject is alive. Such verifications have been accomplished by passively verifying physiological process, such as registering electrical impulses (EKG), or actively verifying physiological norms by introducing and capturing a modified signal, such as
30 introducing light energy to determine blood gas content (pulse oximeter). Examples of such biometric readings are describe in United States Patents: 5,719,950; and 5,737,439. The disclosures of each of the patents listed above are hereby incorporated by reference.

One of the downfalls of using the devices which are currently available in the market for analyzing external biometric markers is the cost of installing the necessary
35 scanning devices to provide the required security. For each different trait to be tested, whether it is a fingerprint, retinal scan, voice print, or the like, a different piece of

expensive scanning equipment is necessary. Installation of such equipment into machines such as ATMs is economically impractical because each ATM would require the installation of the expensive scanning device.

5 Another downfall of the biometric scanning devices currently available is their size. The necessary scanning equipment is bulky, making it impractical to attach the scanning equipment to portable devices such as cell phones, credit cards, personal data assistants, portable computers, and the like.

10 Further, incompatibility across multiple systems renders the deployment of standard biometric identification on a wide scale very challenging, if not impossible. In addition, large databases storing the vast amount of data necessary to authenticate biometrically activated transactions or authentications result in further costs which have heretofore made biometric identification a poor candidate as a security device for low level or mass produced systems.

15 The downfalls of the current biometrically activated security systems can be overcome through the use of portable biometrically activated devices which only store the biometric profile of a single individual or a small group of individuals. The use of unique internal biometric markers, rather than external biometric markers, provides advantages which overcome the downfalls of the present biometric scanning devices used for security and the identification of individuals.

20 BRIEF SUMMARY OF THE INVENTION

The present invention provides an apparatus and process which utilizes unique internal human biometric markers to verify the identity of the user of the biometrically activated device or provide access or control over an electronic component. More specifically, the biometrically activated device of the present invention allows non-
25 invasive access to a unique internal biometric marker, or some combination of unique internal biometric markers, and compares the scanned biometric marker to a biometric marker or profile stored within the biometrically activated device, thereby attempting to verify the identity of an individual using the biometrically activated device. A biometric marker, for the purposes of this invention, is a human internal physiological
30 characteristic, or biologically active feature, which, preferably, is unique to each individual member of the human race. The biometric markers of the present invention are not merely measurements of superficial anatomical structure, but instead utilize or alternatively include measurements of physiological traits of the various systems of the human body and/or are histological traits associated with tissues of the human body. In
35 addition, a unique biometric marker is one which does not significantly vary over time such that the biometric marker is always unique to the individual. The device scans a

selected body part or biological feature of the user, taking an internal biometric measurement or recording internal biometric data from the same.

5 A biometric profile of the subject attempting to activate the biometrically activated device may be electronically constructed from the data or measurement obtained. The profile, measurement, or data is then analyzed and compared to a stored biometric profile, or profiles, to determine whether or not the user is authorized to use the device or access the information that the biometrically activated device is protecting. As with a conventional door key, the authorization or verification of a valid user triggers the biometrically activated device to unlock certain information or activate or provide access
10 to that which the device is protecting.

In its simplest form, the biometrically activated device comprises a biometric sensor and a memory module. The biometric sensor obtains the requisite internal biometric measurements or data from a user and compares the measurements or data to a biometric profile stored within the memory module. If the biometric profile stored in
15 the memory module matches the measurements or data obtained from the user of the biometrically activated device, the biometrically activated device provides access to the data stored within a memory module, triggers the disengagement of a locking mechanism, or performs a function on a mechanical device.

The biometrically activated device transmits or emits energy towards a human
20 user. A portion of the emitted energy is reflected back to the biometrically activated device where it is received. The received signal is then transformed into an electric signal which represents a unique biometric profile of the user. The profile may then be compared to a biometric profile stored in the memory module of the biometrically activated device. If the user's profile matches a profile stored within the memory
25 module, the biometrically activated device is activated or is permitted to function in the manner in which it is programmed to function.

The biometrically activated device can provide a means to control access, secure information, initiate electrical components, or provide a general security system. The internal biometric marker or combination of markers scanned is unique to each individual
30 and, thus, difficult or impossible to otherwise reproduce. Likewise, the biometric profile stored within a biometrically activated device is unique to the device. Without knowledge of the specific internal biometric marker or markers scanned by the biometrically activated device, a biometric profile cannot be reverse engineered or reconstructed so as to activate the biometrically activated device. In other words, the
35 biometrically activated device may scan a user for numerous unique biometric markers, however, without knowing which marker is compared within the memory module,

reverse engineering is virtually impossible. In this fashion, the biometrically activated device provides superior security features over present day security systems.

The biometrically activated device of the present invention focuses on internal biometric markers unique to a specific individual, instead of external biometric markers, such as fingerprints, or non-unique biometric markers, such as blood pulse readings, and overcomes the problems associated with traditional security systems to provide a more viable alternative to the external biometric sensors currently available.

BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly pointing out and distinctly claiming that which is regarded as the present invention, the advantages of this invention can be more readily ascertained from the following description of the invention when read in conjunction with the accompanying drawings in which:

FIG. 1 is a schematic of a preferred embodiment of a biometrically activated device; FIG. 2 is a plan view of one embodiment of the biometric device of the present invention; FIG. 3 is a cut-away plan view of the biometric device of FIG. 2; FIG. 4 is a plan view of the biometric device of FIG. 2 in an activated state; and FIG. 5 is a plan view of the back side of the biometric device of FIG. 2.

DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

Generally, the biometrically activated device of the present invention comprises a sensor for sensing or determining certain internal biometric markers of a user in communication with a memory module for storing biometric data or biometric profiles of a user or users corresponding to the internal biometric markers obtained by the sensor. When a user attempts to activate the biometrically activated device, the biometric sensor creates a biometric profile of the user and compares that profile with the stored biometric profile of an authorized user. If the user's profile does not match the profile of an authorized user, the data or information stored within the biometrically activated device is unretrievable. However, if the user's profile matches that of an authorized user, the biometrically activated device becomes activated for a set duration of time, thereby providing access to the data or information stored within the biometrically activated device or allowing the user to operate an apparatus which the biometrically activated device protects.

The biometric sensor is configured to determine specific unique internal biometric markers of a user. In a preferred embodiment of the invention, the sensor includes an emitter and a receiver. The emitter emits light or another form of energy which is partially absorbed and partially reflected by a portion of flesh of a user. Such light or energy may include, but is not limited to, ultrasonic energy, infra red light, near infra red

light, ultra violet light, specific wavelength-visible or nonvisible light, white light, or electrical signals. The receiver collects those portions of light or energy that are reflected from the user. Based upon the light or energy reflected, data relating to internal biometric markers may be determined and a biometric profile of the user may be constructed. Some of the internal biometric markers which may be measured or determined from the biometric sensor include, but are not limited to, bone density, electromagnetic waves, cardiac rhythms, diacrotic notch readings, blood oxygen levels, capillary density, glucose levels, hematocrit levels, or sub-dermal layer analysis. Other biometric markers, such as bio-electric signals, resistance, impedance, capacitance, or other detectable electrical signals emanating from the body may also be detected by the sensor and used or combined with the feedback to the receiver to create a biometric profile of the user.

The biometric sensor may also include an activation device for activating the biometric sensor so that the biometric sensor is not always activated. Examples of the biometric sensor portion of the biometrically activated device of the present invention are more fully explained in the examples described below.

The memory module of the biometrically activated device is capable of receiving and storing data. The memory module is also capable of performing functions on the stored or received data to effectuate the creation of a biometric profile for a user. A biometric profile is based upon an internal biometric marker or markers of the user. Energy signals obtained from the biometric sensor may be converted into electrical signals which in turn may be converted to a biometric profile based upon a mathematical algorithm or transformation. The memory module may also store the commands or programming which will allow access to the apparatus being protected, or stored data such as phone numbers, account codes, or other information which a user wishes to keep private. Examples of the memory module of the present invention are further explained below.

Because the biometrically activated device is based upon a user's profile, the biometrically activated device is at least capable of accepting an initial biometric profile corresponding to the desired authorized user. The profile may be determined from the first use of the biometrically activated device or, alternatively, programmed before the first use in accordance with predefined biometric profiles.

FIG. 1 illustrates a schematic of the preferred embodiment of the biometrically activated device of the present invention. The device 50 includes a biometric sensor 60 and a memory module 70. The biometrically activated device is activated by the contact of a user 80 with the biometric sensor 60 of the device 50. Preferably, the user 80 will activate the device 50 by placing a finger on the biometric sensor 60 for a period of time

causes the actuation of a device, such as a door lock, in communication with the memory module. Further examples are described herein.

FIG. 2 illustrates another preferred embodiment of a biometrically activated device: a credit card. A biometrically activated device is an integral portion of a biometric device 100, which in this case has the same shape, size and dimensions as a typical credit card. It is understood, however, that the shape, size, and dimensions of the credit card are not limiting to the invention.

As illustrated, the biometric device 100 includes a biometric sensor having a light emitter 112 and a light acceptor 114. The biometric sensor 110 may additionally include an activation device 116 as shown in FIG. 2. Activation of the biometric sensor 110 triggers the light emitter 112 to emit a light 113. An example of a suitable light emitter 112 is a light emitting diode (LED). Various types of LED's or alternative light sources may be substituted as the light emitter 112 depending upon the desired wavelength and characteristics of light 113 emanating therefrom. The light acceptor 114 can be any device capable of absorbing reflected light 113.

In normal use, an individual wishing to use the biometric device 100 places a body part, such as a thumb or finger, over the biometric sensor 110 such that light 113 emitted from light emitter 112 is directed toward the body part and is reflected back towards the light acceptor 114. Typically, the biometric sensor 110 will include an activation switch 116 which activates the biometric sensor 110 when a body part is placed over the biometric sensor 110, and causes light 113 to be emitted from the light emitter 112 for a fixed duration of time. Light 113 is partially absorbed and partially reflected by the body part covering the biometric sensor 110. Reflected light 113 is monitored by the light acceptor 114.

A preferred embodiment of the invention utilizes an infra red LED, which emits sufficient infra red light to penetrate the epidermal layer of skin of a user. A portion of the infra red light is reflected back to the light acceptor 114 while the remainder of the light is absorbed or lost. Based upon the amount of light reflected back to the light acceptor 114 over a period of time, a biometric profile may be established. The portion of the light signal received by the light acceptor 114 is compared to biometric data or a biometric profile stored within the biometric device 100. If the light signal is identical to the biometric profile stored within the biometric device 100, the biometric device is activated. Where the light signal does not correspond to the stored biometric data or profile, the biometric device is not activated and the biometric sensor 110 is temporarily turned off.

Activation of the biometric device 100 requires proper identification of the user of the biometric device 100. FIG. 3 depicts a cut-away plan view of the biometric device 100 exposing a memory module 120 in communication with the light acceptor 114 of the biometric sensor 110. The biometric profile of the authorized user is stored within the memory module 120. Other data, such as account codes, names, addresses, pass codes, or graphics, may also be stored within the memory module 120. Once a biometric profile of the user is constructed by the biometric sensor 110, the user's biometric profile is compared to the biometric profile stored within memory module 120. If the user's biometric profile matches that of the biometric profile of the authorized user stored in the memory module 120, the memory module allows access to at least a portion of the additional data or information stored within the memory module 120.

The biometric sensor 110 may also include a translator (not shown) which interprets the level of light or energy received by the light acceptor 114 and constructs a biometric profile based upon the data received. The translator may also be an integral portion of the light acceptor 114 wherein the amount of accepted light is transformed into an electric signal. The biometric profile is then compared to the biometric data or profile stored within the memory module 120.

Upon activation of the biometric device 100 of FIGS. 2 and 3, the memory module 120 releases the information, such as account information, required to perform an electronic transaction. The information stored in the memory module 120 may be released in a number of ways. As illustrated in FIG. 2, only a portion of the account numbers 150 are embossed on the biometric device 100. In the instant example, a blank liquid crystal display (LCD) 155 is positioned next to the account numbers 150. Upon activation of the biometric device 100, the memory module 120 activates the LCD 155 and communicates the information necessary to display the remaining account numbers 151 on the LCD 155, as illustrated in FIG. 4. Likewise, upon activation of the biometric device 100, the memory module 120 may repeatedly send account information to a magnetic transmitter 160 on the biometric device, as depicted in FIG. 5. The magnetic transmitter 160 shown in FIG. 5 may reside in the same location occupied by the magnetic strip of a credit card, such that the biometric device 100 may be used in the same manner as a credit card upon activation.

Other methods or devices for communicating the data or information stored within the memory module 120 may also be used. For example, the LCD 155 could be replaced with LED's or alternative display devices. Likewise, the magnetic transmitter 160 may be replaced with a digital device providing digital signals for a transaction or

a light emitter which would release the data or information stored in the memory module 120 by the emission of visible or non-visible light.

5 It is intended that the biometric device be self-calibrating. For example, the original biometric data or profiles stored in the memory module 120 may be calibrated through repetitive use. As the biometrically activated device is used, the biometric profiles obtained are averaged such that a specific number of the most recent successful biometric readings, offset by the original biometric profile, are used to create a more complete biometric profile of the authorized user.

10 As part of the built-in security feature, the biometric device 100 can automatically deactivate. For example, the memory module 120 may be programed such that, once the user is authenticated and the biometric device is activated, the memory module 120 will display the account numbers 150 on an LCD 155 and/or repeatedly send account information to a magnetic transmitter 160 for a fixed duration of time. Thus, access to the information stored within the memory module 120 may be limited to a specific period of time needed to carry out an electronic transaction. This feature advantageously prevents the unnecessary display of account numbers 150 and electronic copying of information permanently stored in magnetic strips of current credit cards. In addition, because the biometric device 100 may only be activated by the authorized user, others are prevented from using the biometric device 100 to perform an invalid transaction.

20 The biometric device 100 may further include a power source 170 to supply the necessary energy for the operation of the biometric device 100, as depicted in FIG. 3. The power source may be in the form of a battery, a capacitor, a fuel cell, or alternative energy-producing or storage mechanism. Likewise, the power source may be rechargeable. Examples of alternative power sources include photocells, piezo electric generators, static generators, heat absorbers and other power generation mechanisms.

25 Use of the biometrically activated device of the present invention is not limited to use in credit cards. For example, a security badge could employ the present invention, allowing only the authorized user the ability to use the security badge. Likewise, drivers licenses or other identification cards using the biometrically activated device would guarantee that only the authorized user could properly operate the biometric device. For example, a drivers license could employ a biometrically activated device. The data on a drivers license, or the picture of the individual owning the drivers license, stored within the memory module could be displayed upon the proper authentication of the user of the license.

35 The biometrically activated device of the instant invention could additionally be utilized in cell phones. As cell phones become more advanced and more information is

stored within the cell phone, it is desirable to provide a means with which to secure the data stored therein. As cell phones and Personal Data Assistants (PDA) are integrated and combined, the need for security will become even more imperative. In order to protect such devices and restrict access to the authorized users of the device, a cell phone
5 or PDA (or combination thereof) could be equipped with the biometrically activated device of the present invention. Thus, the cell phone or PDA could only be activated by the owner or other authorized user of the device.

Additional components connected to the biometrically activated device also expand the uses of the device. For example, instead of releasing data, such as account
10 numbers, the memory module 120 of the device could be programmed to actuate a mechanical device, such as a door lock. The necessary control codes, or required programming in the biometrically activated device allow a user to perform mechanical functions based upon the proper authentication of the user.

It is understood that the present invention is not limited in use, but rather may be
15 employed in any environment where it is necessary or desirable to provide an inexpensive and portable security measure which restricts use of a device to individuals having certain, programmed biometric profiles to access data or information stored within the device or initiate a process.

Embodiments of the present invention can include, but are not limited to, card-
20 based products such as credit cards, smart cards, debit cards, ATM access cards, facilities access cards, security cards, identification cards or other card-based products requiring secure use or activation. Also included, for example, are activation mechanisms for products such as computers, microcomputers, PDA's (personal data assistants), cell phones, secure access systems, secure entry systems, software access mechanisms, PIN
25 number replacement, firearm locks, transaction activation, or voting mechanisms. The present invention can additionally be utilized as a security feature in drivers licenses, passports, theme park passes, safebox access and the like. Further examples include the combination of the present invention with an interactive display screen or computer device to protect computers or information transmitted over the internet.

30 Having thus described certain preferred embodiments of the present invention, it is understood that the invention defined by the appended claims is not to be limited by particular details set forth in the above description, as many apparent variations thereof are possible without departing from the spirit or scope thereof as hereinafter claimed.

CLAIMSWhat is Claimed is:

1. A biometrically activated device, comprising:
5 an biometric sensor for obtaining internal physiological characteristics; and
a memory module in communication with said biometric sensor.
2. The biometrically activated device of claim 1, wherein said biometric
sensor further comprises:
an energy emitter; and
10 an energy sensor.
3. The biometrically activated device of claim 2 wherein said biometric
sensor further comprises an activation sensor.
4. The biometrically activated device of claim 2 wherein said biometric
sensor further comprises an translator whereby signals received from said energy sensor
15 are translated into a biometric profile.
5. The biometrically activated device of claim 2 wherein said energy emitter
emits energy in the form of a light wave.
6. The biometrically activated device of claim 5 wherein said light wave is
infra red light, ultraviolet light, nonvisible light, or visible light.
- 20 7. The biometrically activated device of claim 2 wherein said energy sensor
senses light waves.
8. The biometrically activated device of claim 7 wherein said light wave is
infra red light, ultraviolet light, nonvisible light, or visible light.
9. The biometrically activated device of claim 1 wherein said memory
25 module stores at least one biometric profile.
10. The biometrically activated device of claim 1 wherein said memory
module includes code to trigger an actuator.
11. A biometrically activated device, comprising:
an activation device;
30 an emitter in communication with said activation device whereby the activation device
prompts the emitter to emit energy;
a sensor for receiving reflected energy emitted by said emitter;
a translator in communication with said sensor for converting said received energy into
an electrical signal; and
35 a memory module in communication with said translator whereby said electrical signal
is passed to said memory module.

12. A biometric device, comprising:
a biometric sensor constructed to sense an internal physiological characteristic of a
human; and
a memory module operatively communicating with said sensor to store information
communicated by said sensor.

13. The device of claim 12 wherein said biometric sensor comprises:
an electromagnetic radiation emitter; and
an electromagnetic energy detector constructed to detect reflected electromagnetic
radiation.

14. The device of claim 12 wherein said emitter emits electromagnetic
radiation of a wavelength and energy level to contact an internal physiological
characteristic of a human.

15. The biometric device of claim 12, further comprising a translator, said
translator in communication with said biometric sensor and said memory module, said
translator operating on a signal from said biometric sensor whereby a biometric profile
is created and passed to said memory module.

16. The biometric device of claim 12, wherein said biometric sensor
comprises:
an energy emission component for emitting energy from said biometric sensor;
an energy receiver configured to monitor energy directed towards said receiver; and
an activation device configured to activate said energy emission component and said
energy receiver.

17. A biometrically activated card, comprising:
a substantially planar card having a first surface and opposing second surface;
a biometric sensor integrally contained within said card, said biometric sensor having an
energy emitter and an energy receiver, said energy emitter embedded within said
first surface of said card, said energy receiver embedded within said first surface
and positioned next to said energy emitter;
an activation sensor embedded within said first surface of said card, said activation
sensor in electronic communication with said biometric sensor whereby said
activation sensor controls an on and an off condition of said biometric sensor;
a memory module embedded between said first surface and said second surface of said
card, said memory module in communication with said biometric sensor and
having capacity to store data; and

a data communicator embedded within said second surface of said card, said data communicator in communication with said memory module for communicating data to an external source.

5 18. The biometrically activated card of claim 17 further comprising a data screen embedded on said first surface of said card, said data screen in communication with said memory module.

19. A biometrically activated cellular phone, comprising:
a cellular phone having an activated state and an inactivated state controlled by an activation switch;
10 a biometric sensor embedded within said phone, said biometric sensor having an energy transmitter and an energy receiver positioned on a surface of said cellular phone;
a biometric memory module embedded within said cellular phone, said memory module in communication with said biometric sensor, said memory module in communication with said activation switch of said cellular phone.

15 20. A method of electromagnetically detecting and comparing a unique internal human biometric marker, comprising:
generating a detection signal capable of penetrating the epidermis and being reflected from an internal human biometric marker to form a detectable reflected signal;
detecting said reflected signal;
20 translating said reflected signal into an electrical impulse characterized by said reflected signal;
transmitting said electrical impulse to a memory module having pre-existing stored data;
comparing said electrical impulse with said pre-existing stored data.

21. A method of detecting internal biometric markers, comprising:
25 emitting an energy signal, said energy signal directed at a portion of a human body, at least a portion of said energy signal reflecting off of said human body;
receiving at least a portion of said emitted energy signal reflected off of said human body;
comparing said received energy signal to a pre-existing energy signal.

30 22. The method of claim 21 wherein comparing said received energy signal comprises:
transforming said received energy signal to a user biometric profile;
communicating said biometric profile with a memory device having at least one stored biometric profile; and
35 comparing said user biometric profile with at least one of said stored biometric profile.

23. A method of activating an electrical device, comprising:
detecting an internal biometric marker of a human being;
creating a user biometric profile based on said internal biometric marker;
comparing said biometric profile to at least one stored biometric profile; and
5 activating an electrical device if said user biometric profile matches at least one stored
biometric profile.

24. A method for generating a coded signal comprising:
emitting an epidermal penetrating electromagnetic radiation beam directed to an
individual;
10 reflecting said beam off internal physiological reflected matter to produce a detectable
signal;
detecting said reflected signal;
comparing a profile generating said reflected signal to a stored profile previously
developed from said individual; and
15 generating a coded signal upon a match occurring between said generated profile and said
stored profile.

25. A method for generating a coded signal comprising:
non-evasively detecting unique characteristics of an internal biometric marker of an
individual;
20 electronically producing a profile of said internal biometric marker;
comparing said produced profile with

25

30

35

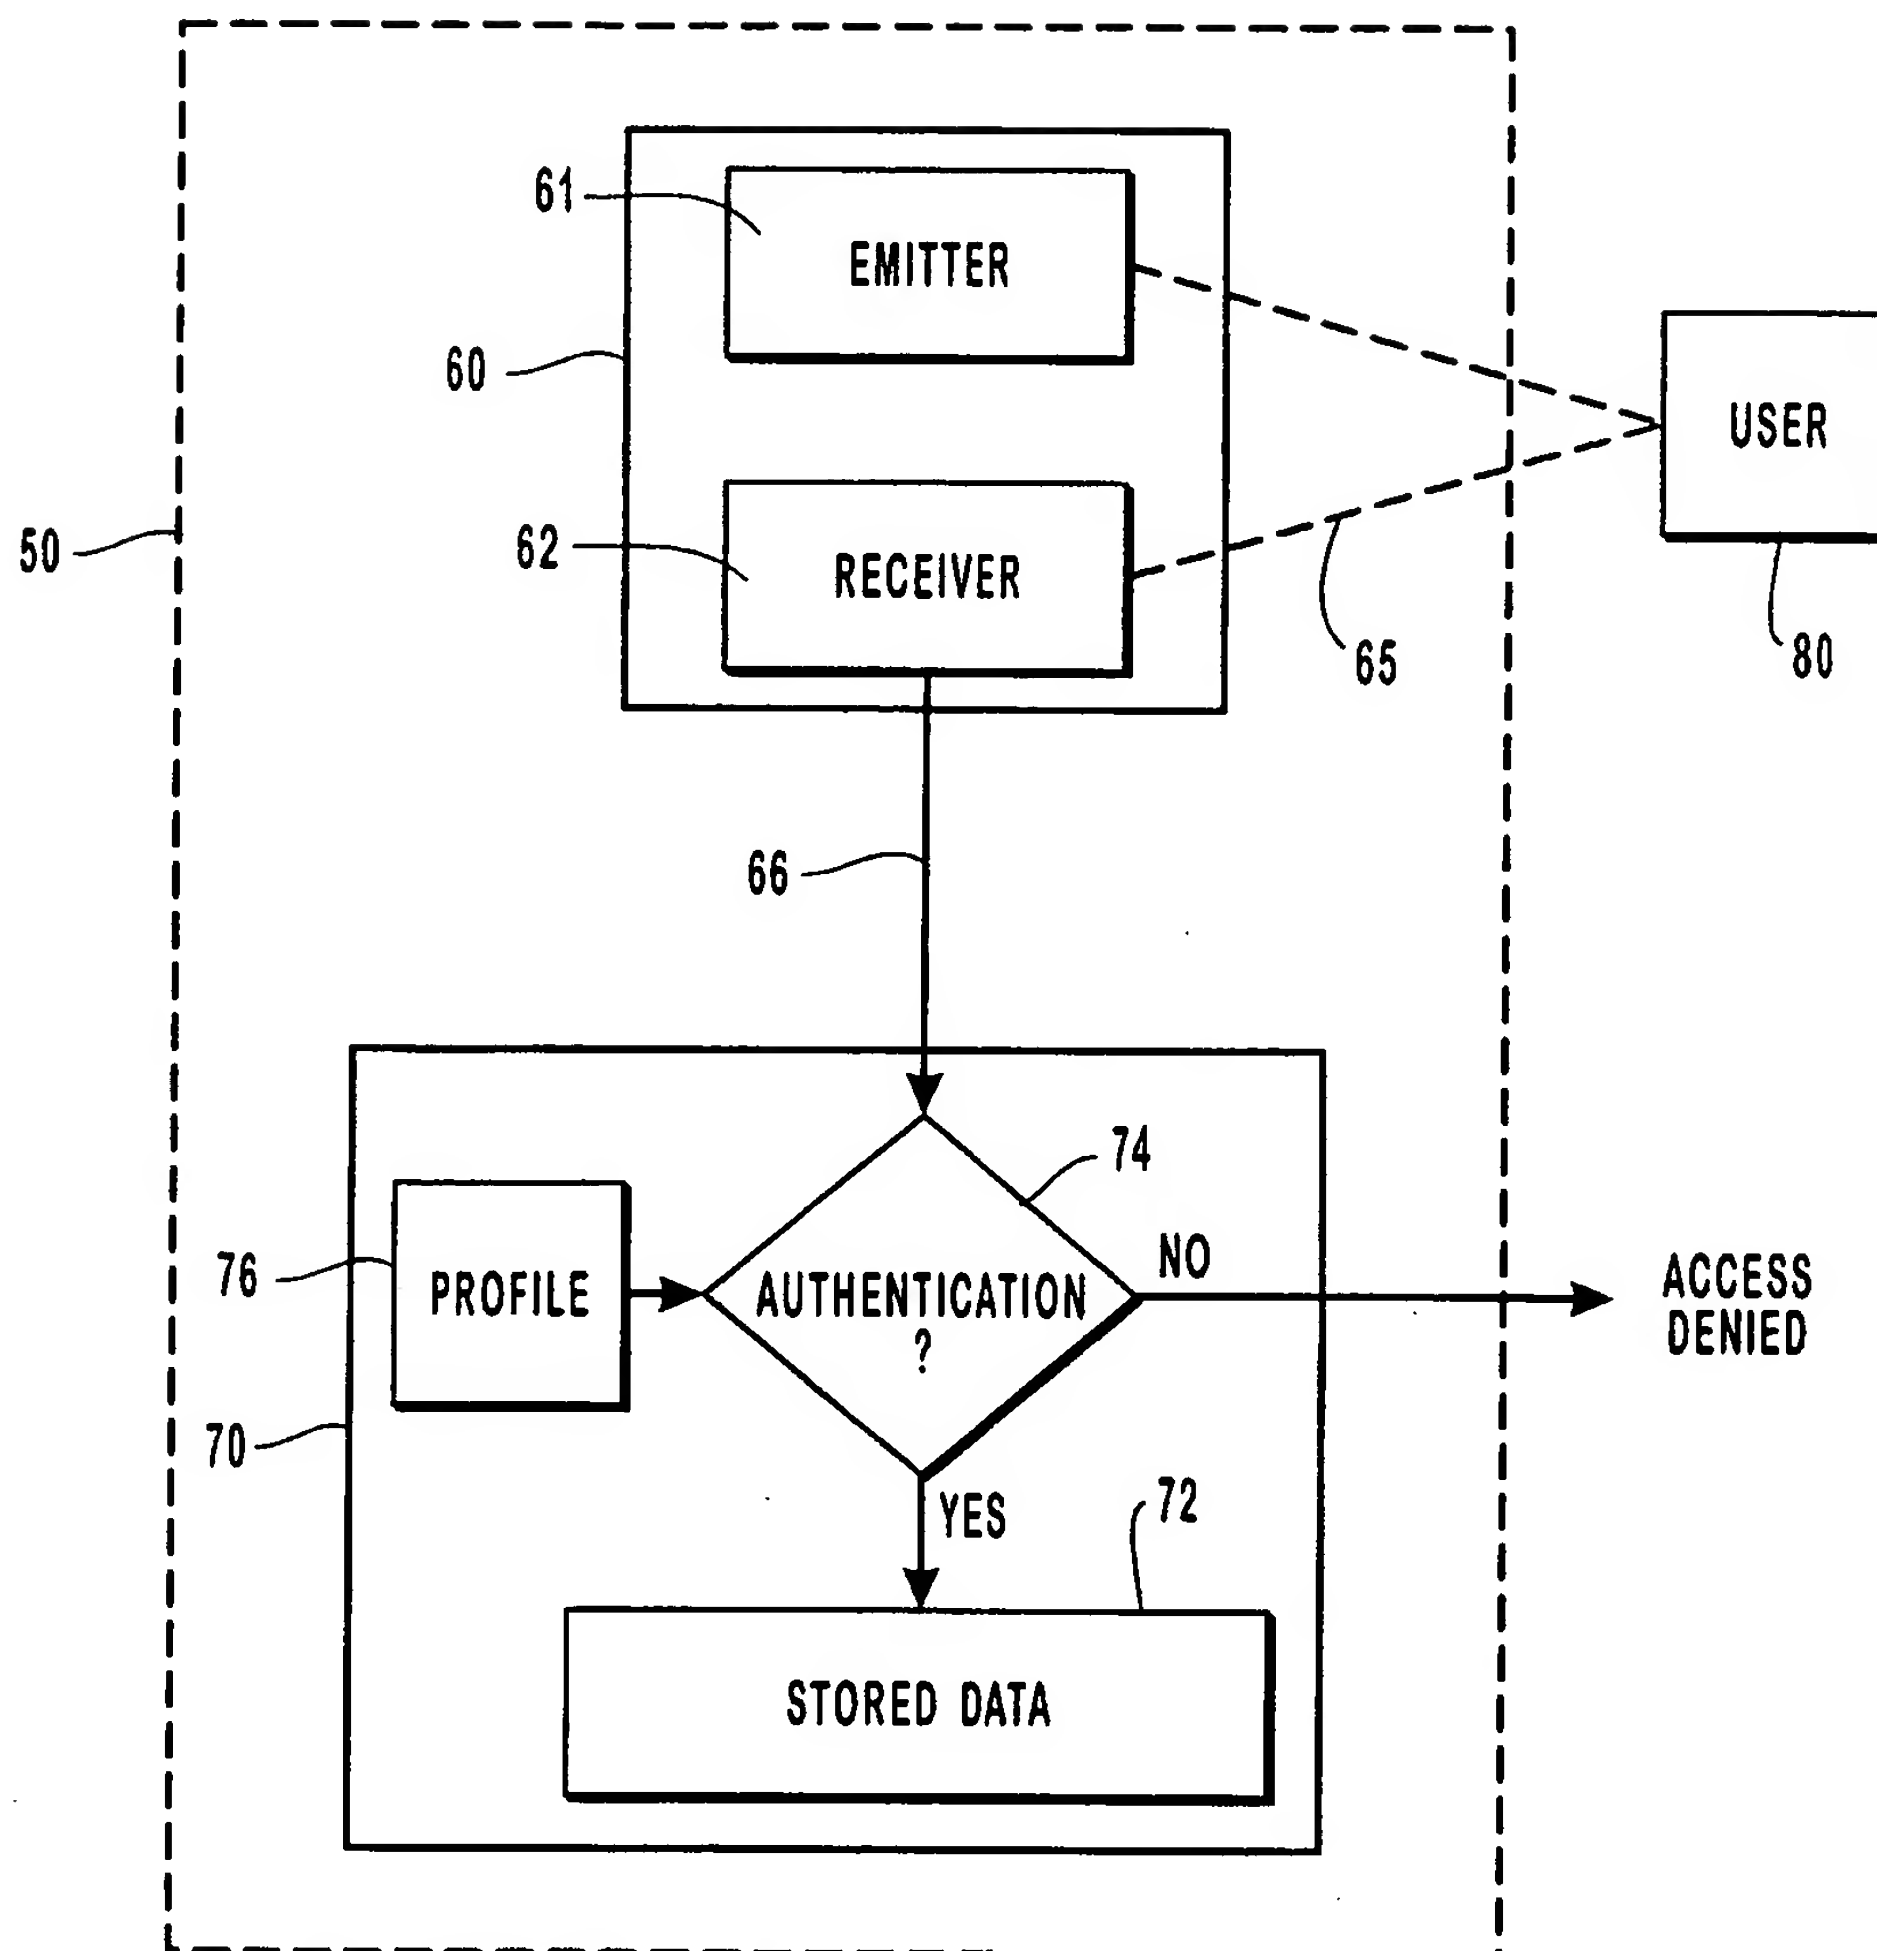


FIG. 1

2 / 3

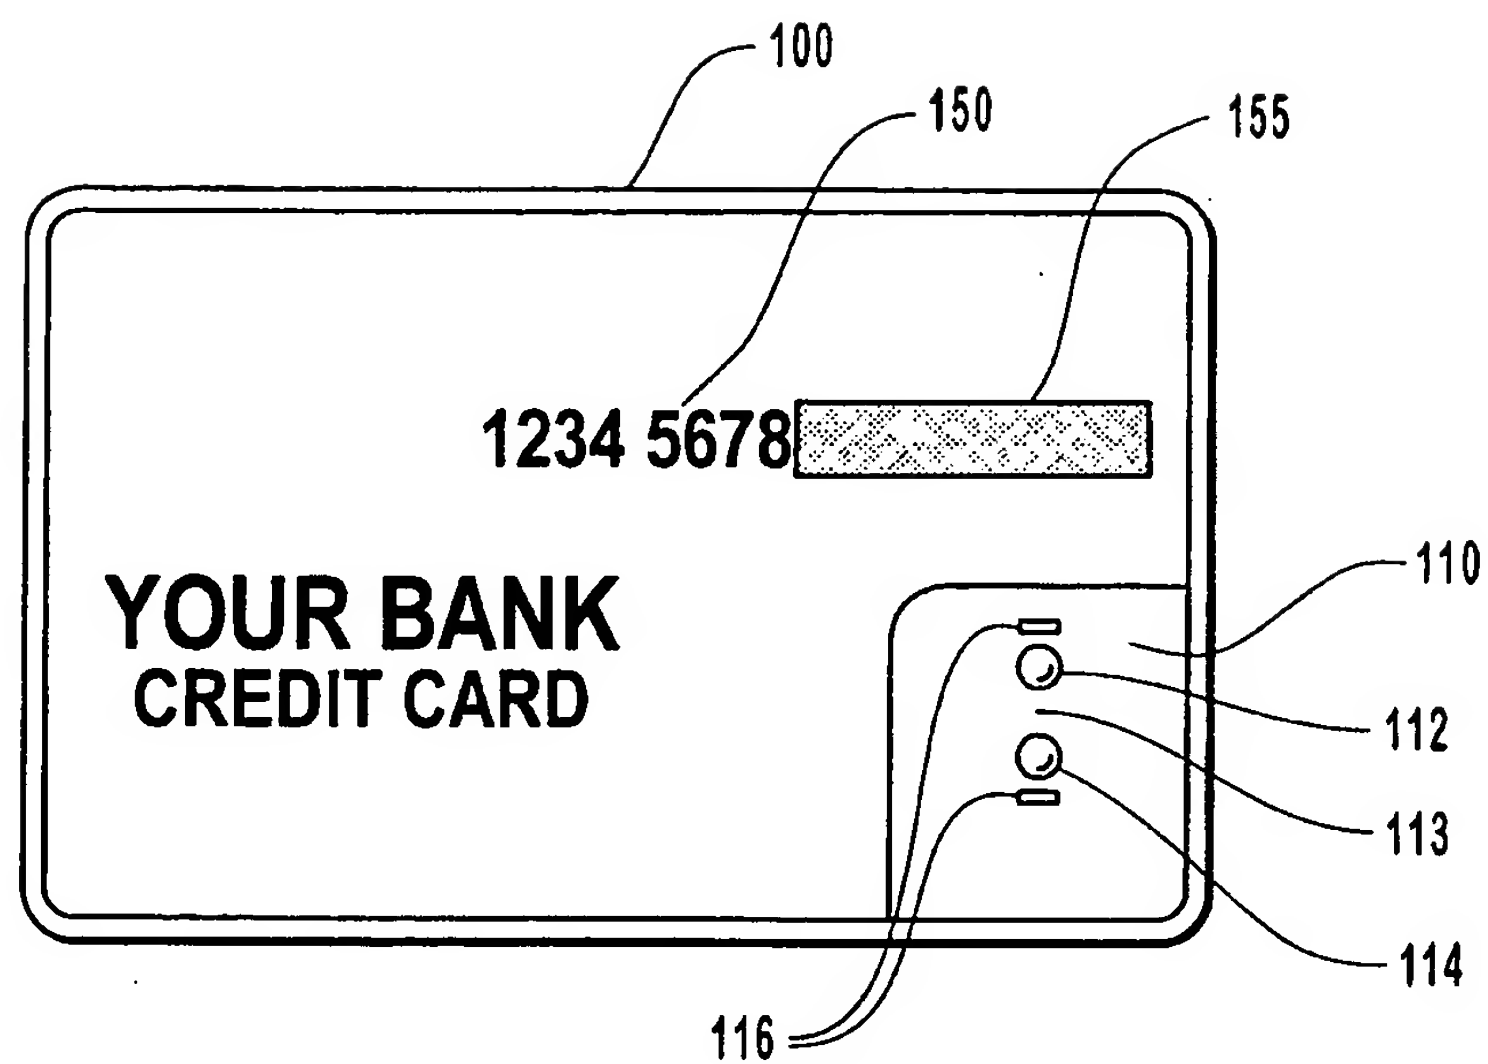


FIG. 2

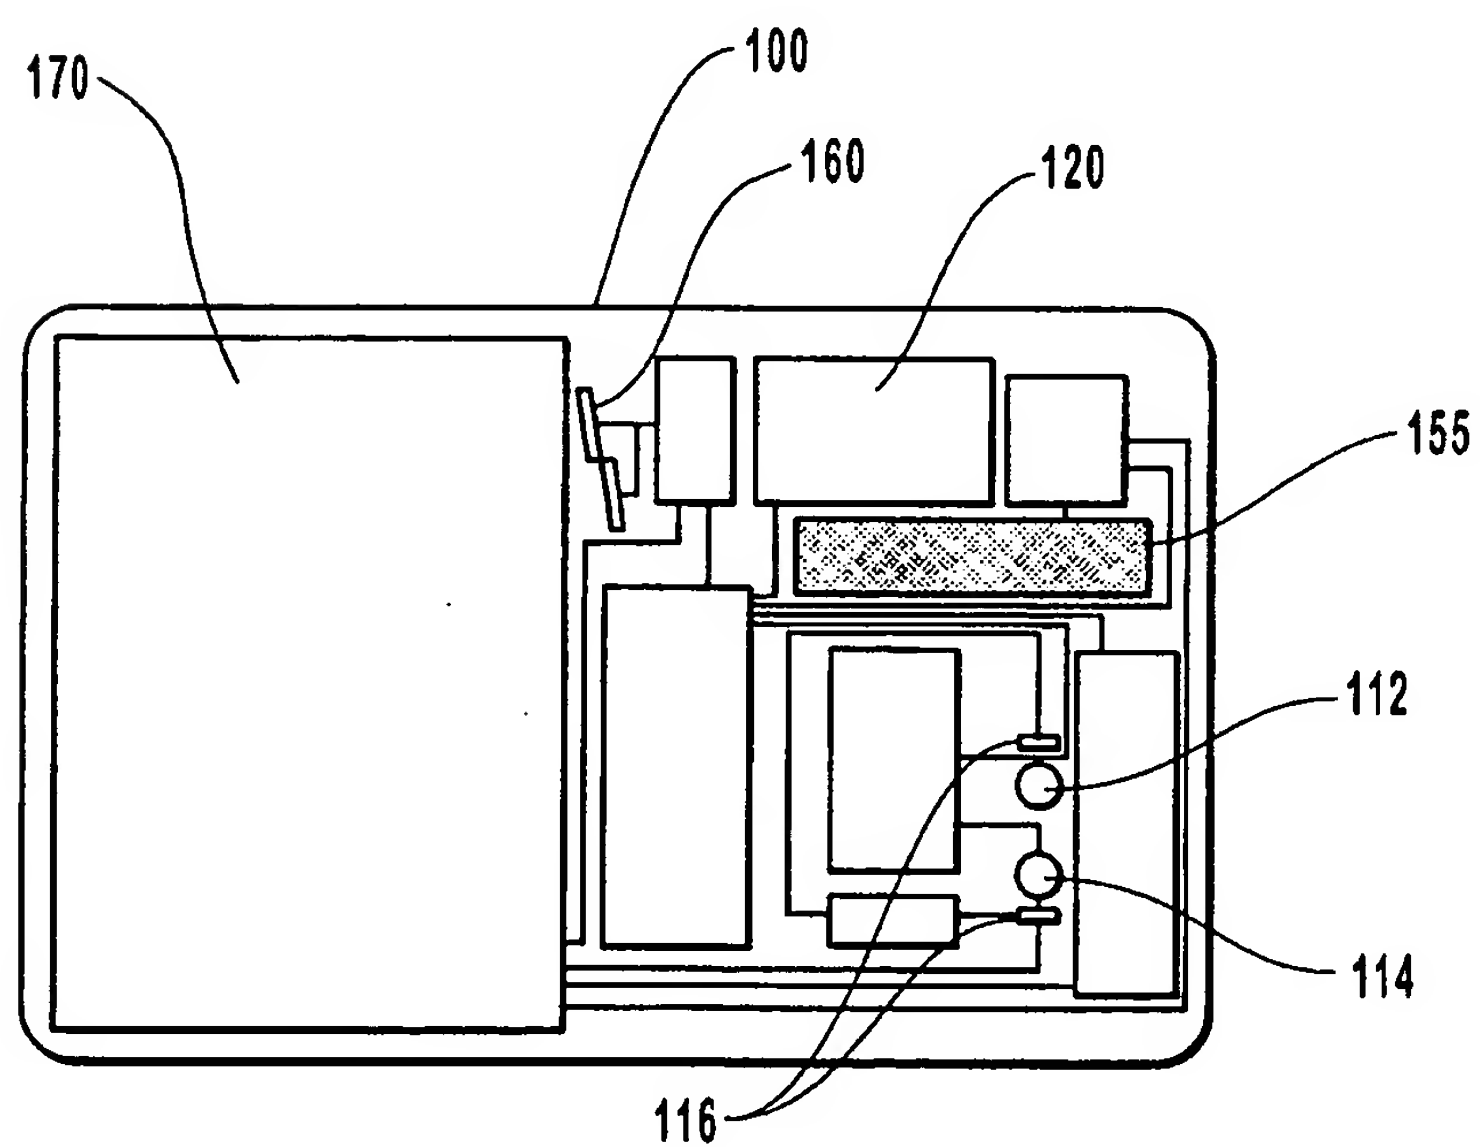


FIG. 3

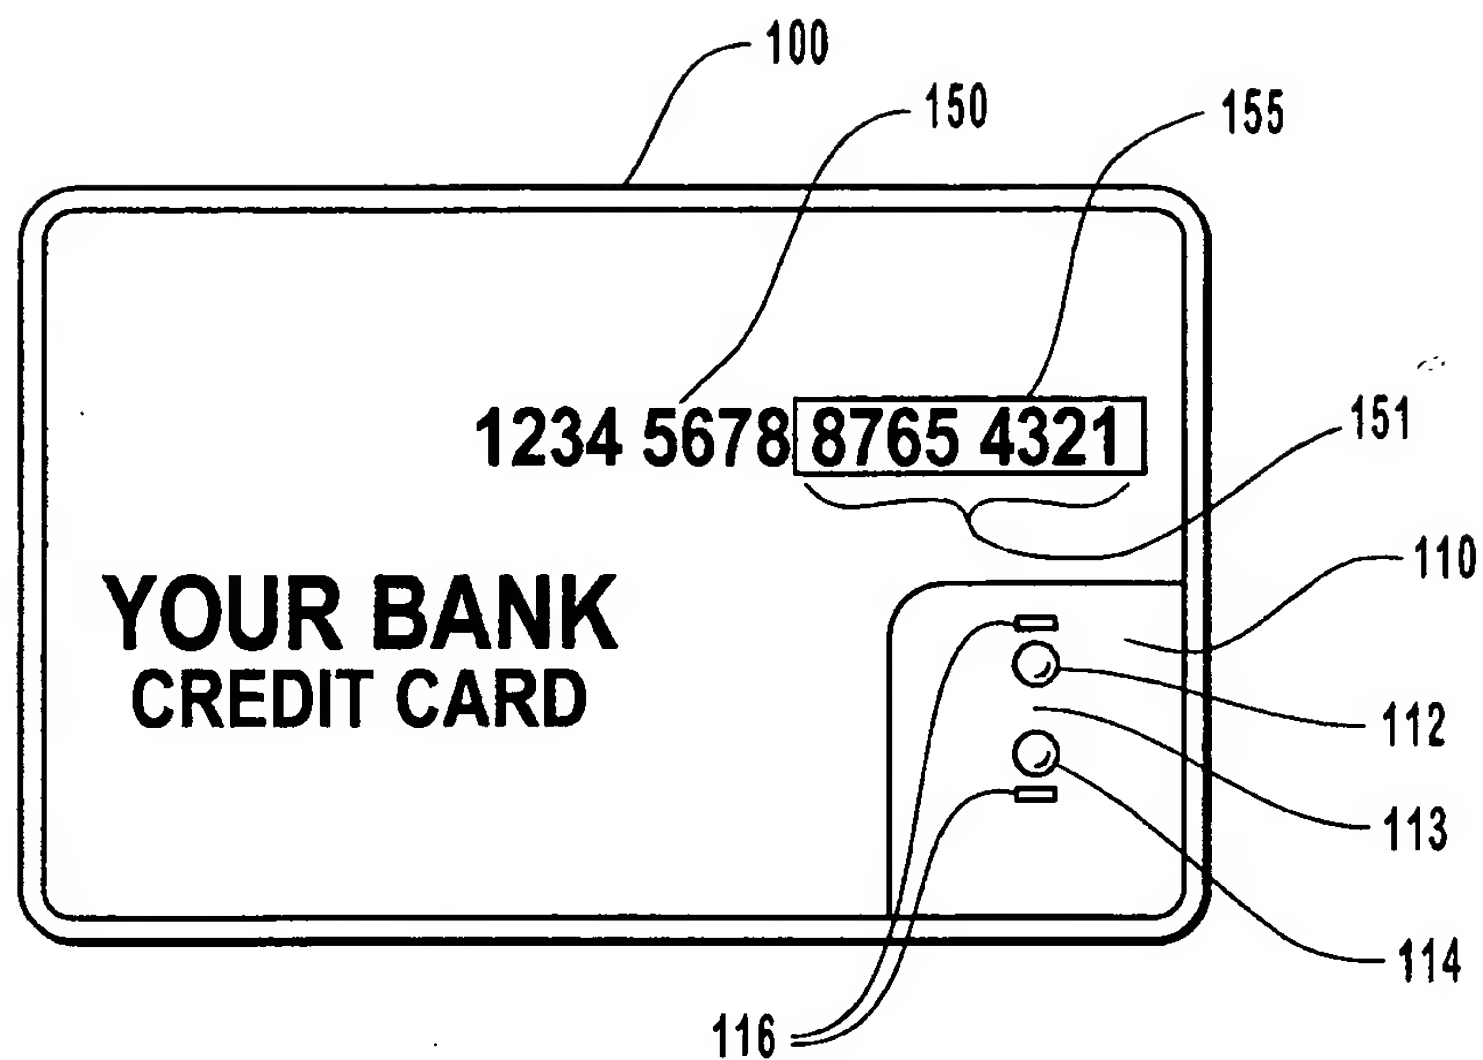


FIG. 4

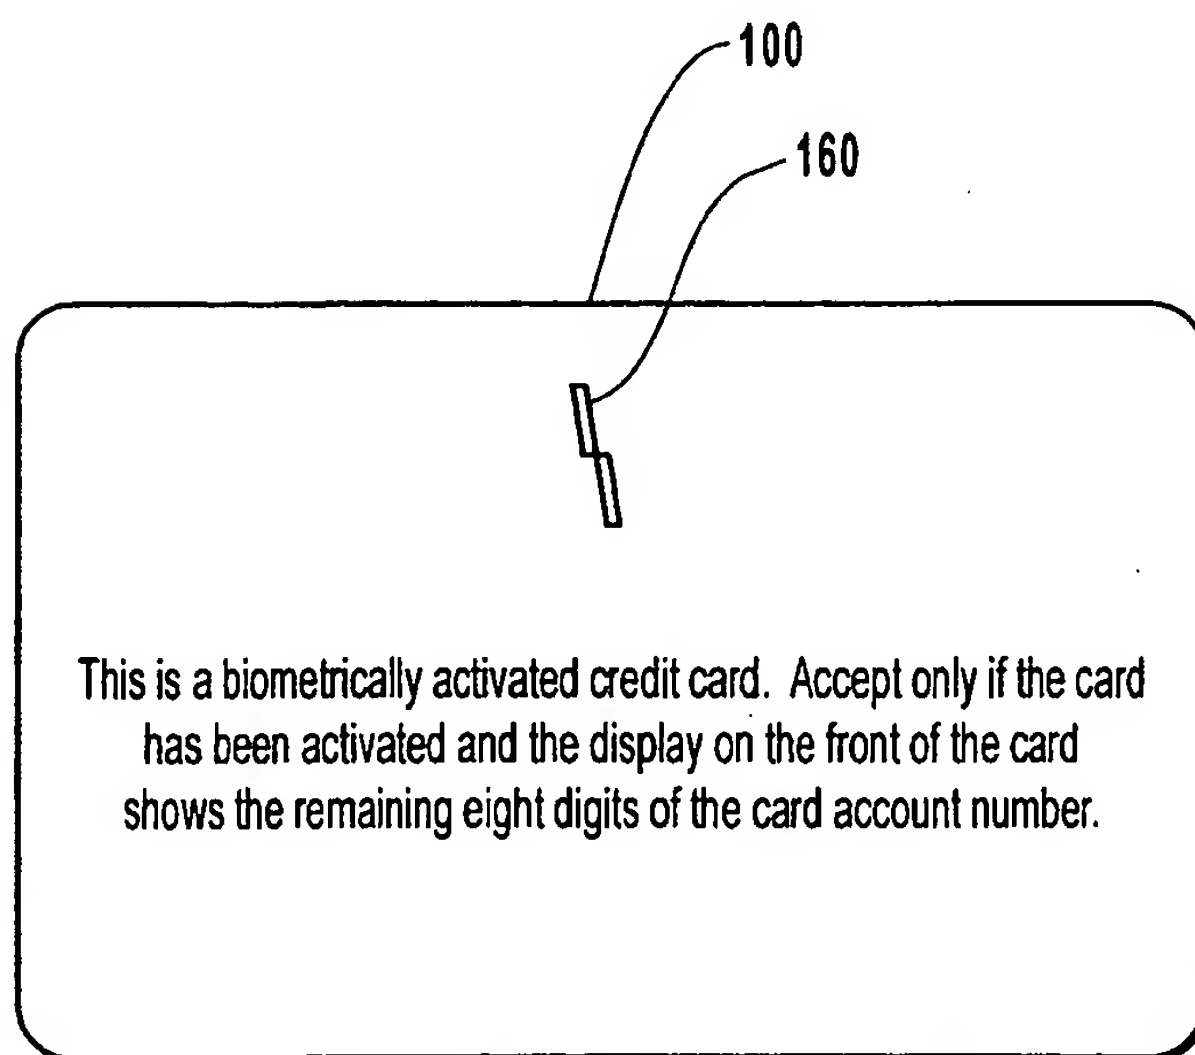


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US01/00829

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) :G06K 9/00

US CL :382/115, 120; 705/2; 707/1

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 382/115, 120; 705/2; 707/1

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

BRS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,704,352 A (TREMBLAY et al) 06 JANUARY 1998, col. 2, lines 36 - 67 , col. 3, lines 1 - 67, col. 4, lines 1 - 12 .	1-16, 20 - 25
Y	US 5, 789,733 A (JACHIMOWICZ et al) 04 AUGUST 1998, col. 1, lines 61 - 67, col. 2, lines 1 - 18 .	17 - 18
Y	US 5,872, 834 A (TEITELBAUM) 16 FEBRUARY 1999, col. 1, lines 65 - 67, col. 2, lines 1 - 67, col. 3, lines 1 - 42 .	19



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

09 MARCH 2001

Date of mailing of the international search report

29 MAR 2001

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

SHEELA CHAWAN

Telephone No. (703) 308-3900

sufficient for the biometric sensor 60 to perform a scan of at least one unique internal biometric marker of the user 80. It is also understood that the device 50 may be remotely activated or may be maintained in an activated state.

5 Activation of the device 50 triggers the emission of energy 65 from an emission device 61. The energy 65 is directed towards a user 80 where it is both absorbed and reflected. The portion of energy 65 reflected back at the device 50 is measured by a receiving device 62. The receiving device 62 interprets the amount of energy 65 received and converts the energy into an electrical signal 66 which is communicated to the memory module 70 of the device 50. In alternate embodiments, the energy received by
10 the receiving device 62 is converted to an electrical signal 66 by a translator (not shown).

 The memory module 70 receives the electrical signal 66 and begins an authentication process of comparing an internal biometric marker, or markers, of the user 80 with the biometric marker, or markers, of the authorized users stored in the memory module 70. The characteristics of the electrical signal 66 represent the internal biometric
15 marker, or markers, which the biometric sensor 60 obtains from the user 80. The memory module 70 compares the electrical signal 66 to a known biometric profile 76 stored within the memory module 70. If the electrical signal 66 is identical to the known biometric profile 76, the biometrically activated device has authenticated the user 80 and allows access to the data 72 stored within the memory module 70. If the electrical signal
20 66, is not authenticated, the biometric device 50 denies access to the data 72 stored within the memory module 70. Preferably, when access to the data 72 is denied, the biometric device 50 automatically turns off.

 Although the electrical signal 66 may be directly compared to the known biometric profile 76, the electrical signal 66 may also be transformed within the memory
25 module 70 prior to comparison with the known biometric profile 76. The electrical signal 66 may be transformed into a mathematical representation or value based on algorithms programed into the memory module 70. The algorithms typically represent the necessary transforms needed to interpret the internal biometric marker represented by the electrical signal 66. The mathematical representation or value, which represents the biometric
30 profile of the user 80, is compared to a known biometric profile 76 stored within the memory module 70. If the mathematical representation or value is authenticated, access to the data 72 stored in the memory module is allowed.

 Once accessed, the data 72 stored within the biometric device 50 may be displayed in some manner or used to perform an act on another device. For example, the
35 data 72 may be displayed on an output device. Likewise, the data 72 may trigger the execution of a program within the memory module 70 such that the memory module 70